





EcoFX
LED lighting solutions

LED Landscape Lights


The Application of Occasions:
Lamp body is suitable for park, square, street, residential zone.

EFX-X Star

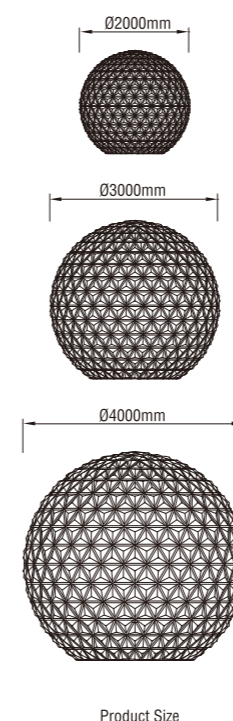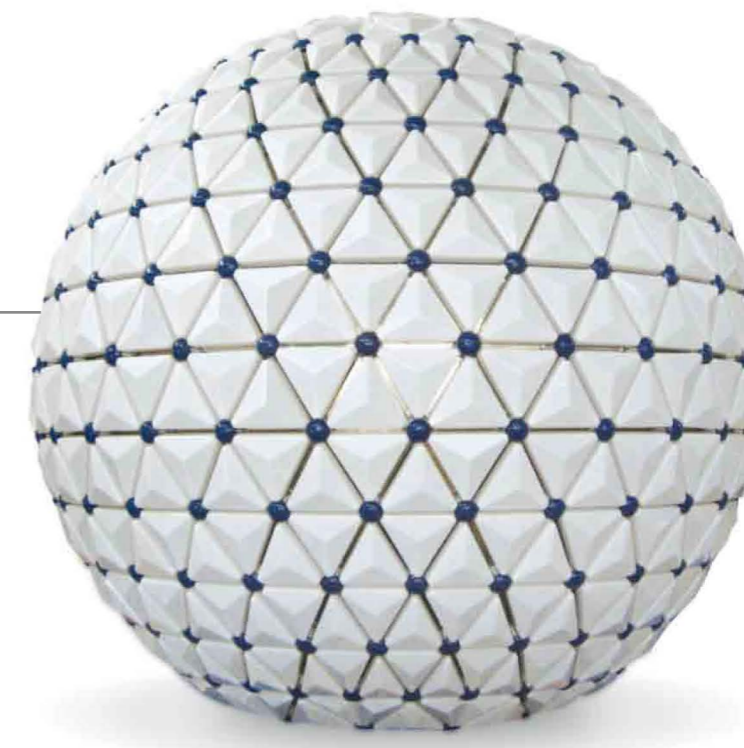

Product Description


Components: frame structure, LED luminary module and control system.
LED luminary module: Latex-filled LED module features good water and heat resistance and good heat radiation and anti-aging properties.
The light chip is made of modified polycarbonate resin with a high anti-UV ray quality and keeps a high luster over a long time without yellowing.

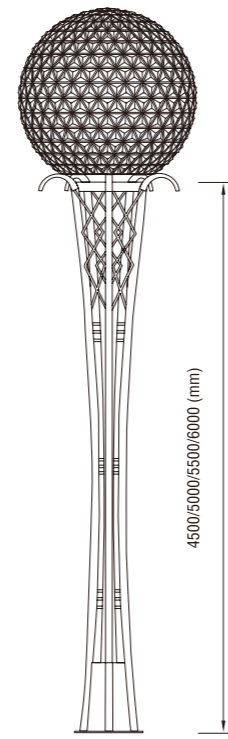

3 Meters Jingri Star

Luminary Variation Effect

“EFX-X Star” illumination system is set and programmed with RS232 Protocol and the point-to-point control is carried out for RGB Tri Primitive Colors to realize seven-color change of overall effect. In this mode, the Program can be changed freely to control the light variation graphics and speed. The light graphics come in over 200 varieties, e.g., transverse variety, cross variety, solid variety and free-combination variety, to meet the need of different ambiances.

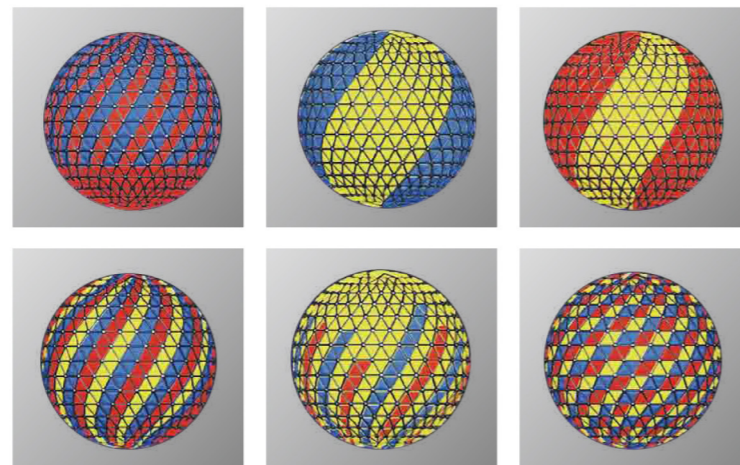

LED Rainbow Lamp of Jinri Star

It is a new energy-saving landscape luminary product developed with general modern technologies such as photo-electronic technology, semi-conduct technology and Integration control etc. In order to meet the increasing demand for better lighting quality in cities. Product core value and competitive advantages lie in its simple and pleasant profile, humanized assembly & design and integrated intelligent chip control the leading-edge, optimized and highly reliable control system is used to control the lamplight intelligently, so that the landscape light is freer, more diverse and flexible. New technical standards have been implemented to upgrade the highly Intelligent, continual and safe products. Therefore, it is more of a full set of illuminating solution to the lighting of a landscape.

Installation



Link rod and knot installation








Connection between control circuit and electrical power circuit.

Specification

Product Code	I	II	III
Ball Diameter	2M	3M	4M
Current Rating	4.5A	10.5A	18.5A
Module Quantity	670PCS	1499PCS	2680PCS
Total Power	MAX 990W	MAX 2310W	MAX 4070W
Input Voltage	AC100~240V	AC100~240V	AC100~240V
Weight	400kg	1100kg	2000kg
Temp. of Working Condition	-20°C~50°C	-20°C~50°C	-20°C~50°C
Humidity of Working Condition	10%~90%	10%~90%	10%~90%
Life	>30000H	>30000H	>30000H
Protection Grade	IP65	IP65	IP65


All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment

LED Landscape Lights






EFX-X Post

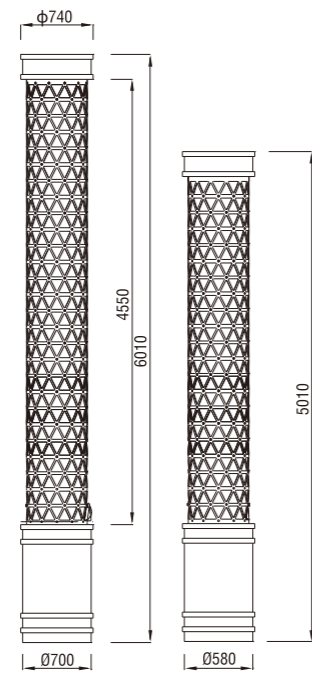

Product Size

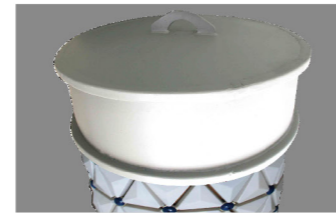

Components



Components

Product Description

Components: frame structure . LED luminary module and control system .

LED luminary module: Latex-filled LED module features good water and heat resistance and good heat radiation and anti-ageing properties The light chip is made of modified polycarbonate resin with a high anti-UV ray quality and keeps a high luster over a long time without yellowing .

Components: frame structure . LED luminary module and control system .

LED luminary module: Latex-filled LED module features good water and heat resistance and good heat radiation and anti-ageing properties The light chip is made of modified polycarbonate resin with a high anti-UV ray quality and keeps a high luster over a long time without yellowing .




Specification

Product Code	700	580
Color	RGB	RGB
Module Quantity	648	420
Input Voltage	220V	220V
Frequency Range	50-60Hz	50-60Hz
Input Current	≤5A	≤3.5A
Control		
Temp. of Working Condition	-40°C~65°C	-40°C~65°C
Humidity of Working Condition	≤85%	≤85%
Life	>30000H	>30000H
Waterproof	IP65	IP65
Insulation	≥50MΩ	≥50MΩ
Weight	450Kg	330Kg

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment

LED Landscape Lights

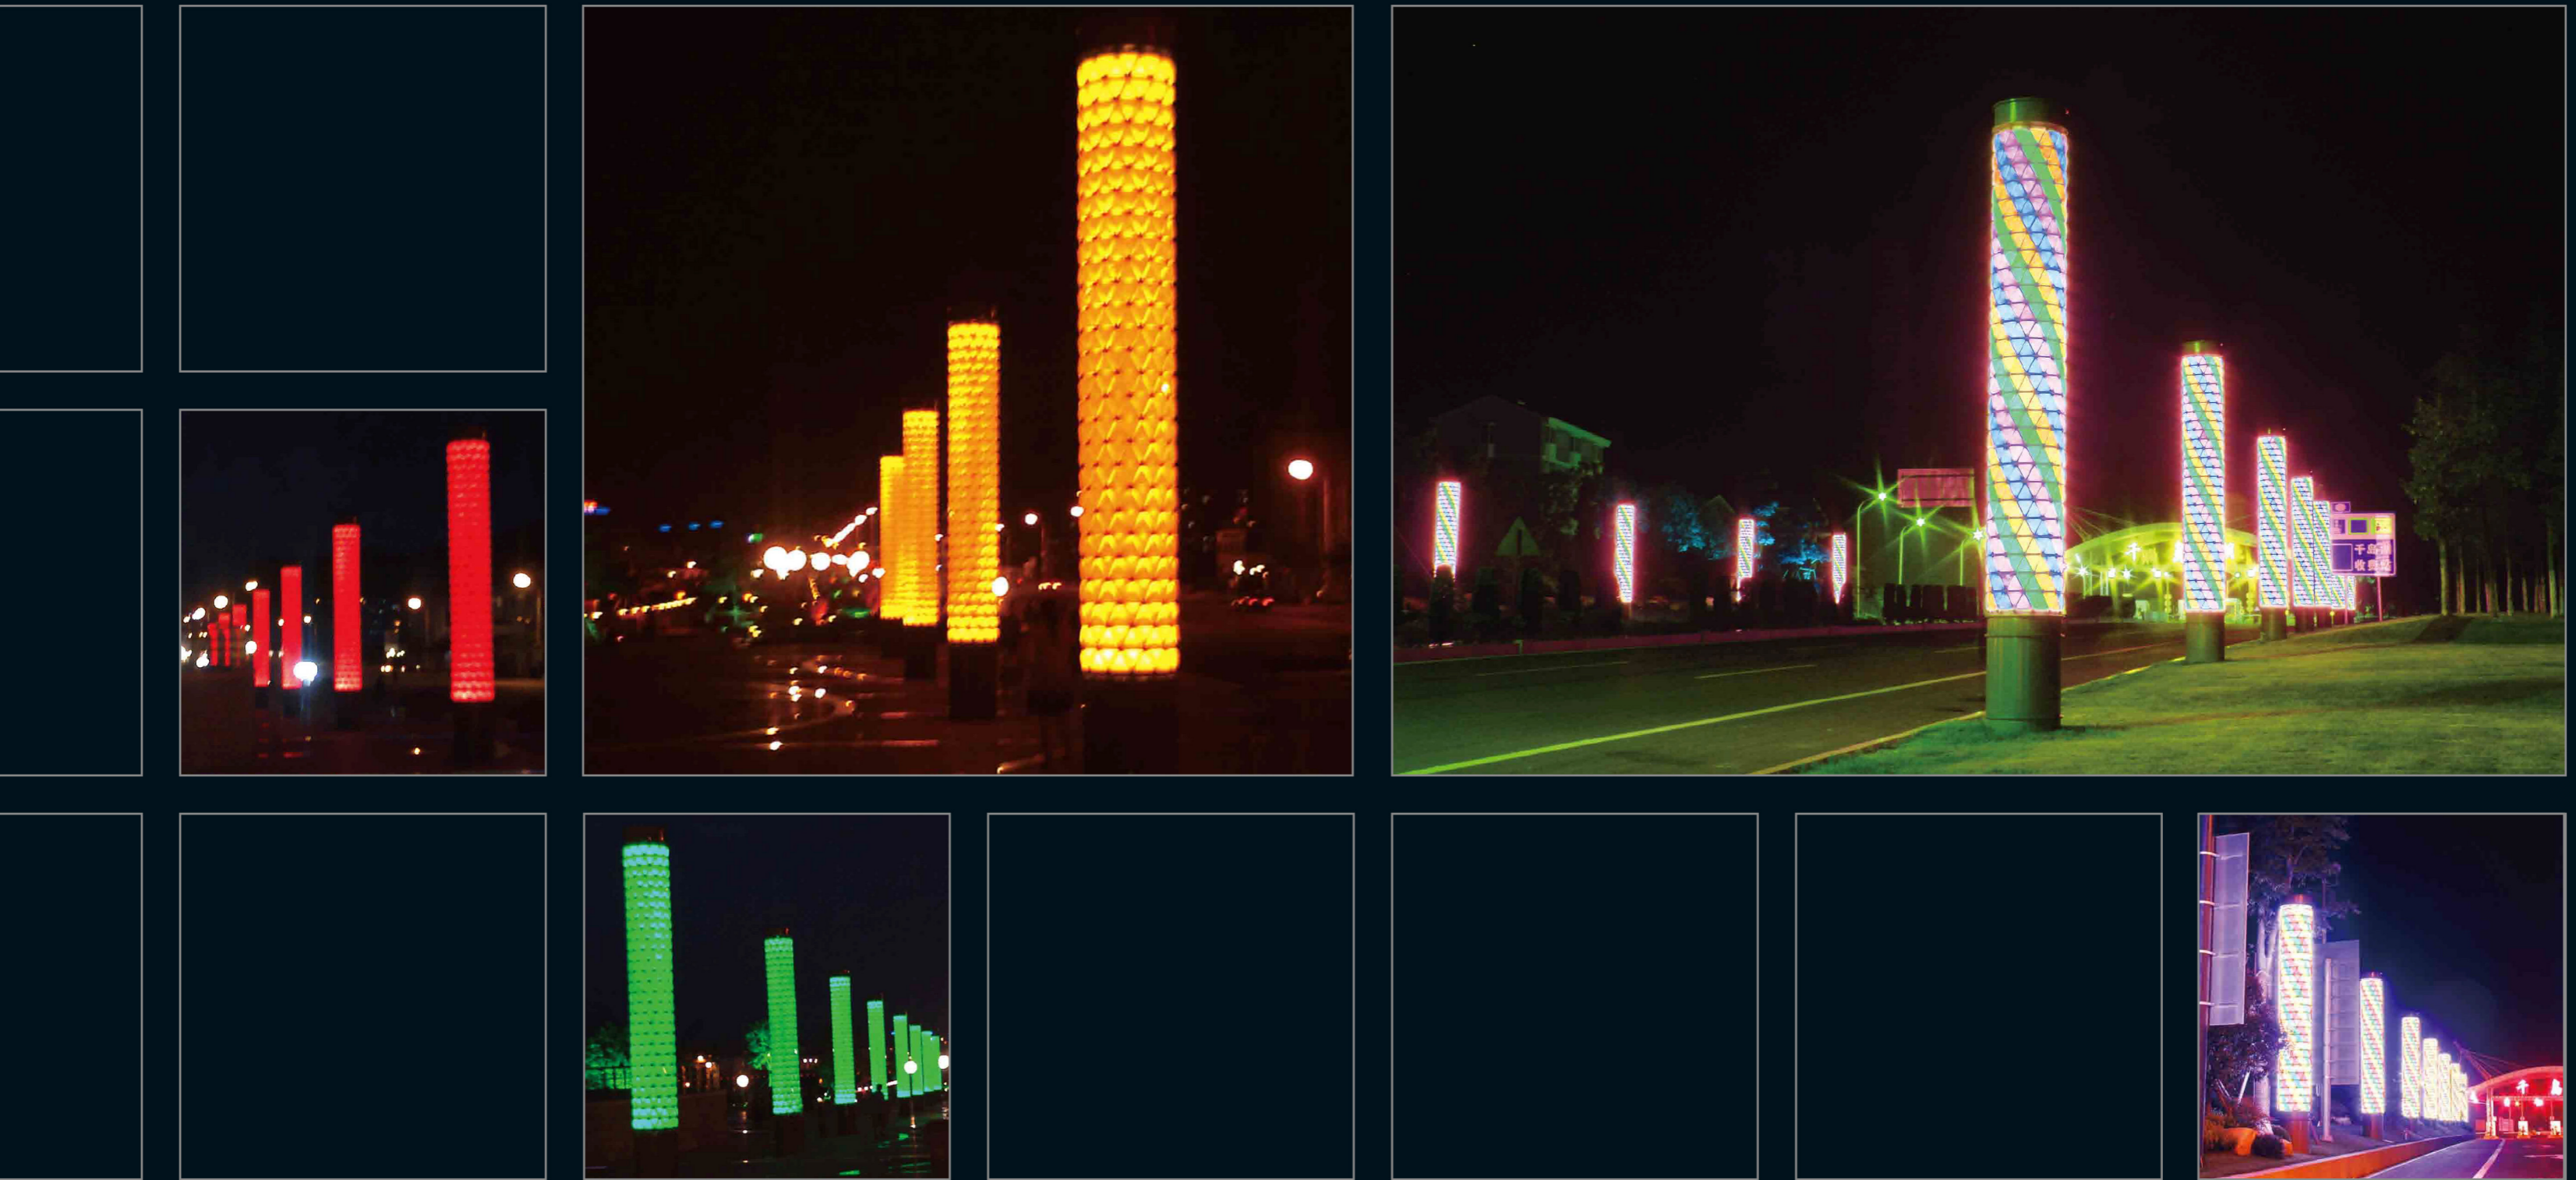

www.eco-fx.co.uk

EcoFX
LED lighting solutions

Office 1, 192 Shoreham Street
Sheffield S1 4SQ, UK
T: +44(0) 114 321 9610
E: enquiries@eco-fx.co.uk

Global Partner

Eco-FX
Smarter LED Lighting Solutions
Australia

