



LED Wall Washer Light Linear Light

The Application of Occasions:
Mainly used for landscape lighting, stage, building, advertising board, green landscape lighting, bar, dancing hall etc.



EFX-XJRL3/6

The appearance of MINI LINEAR LIGHT series is small. It adopts small power LED.6063 aluminium alloy material and automatic filling technology ensure the good heat conduction and protection function. It is a good choice for partial wall wash and wall outline




RGB



Single Lighting




EFX-XJRL3

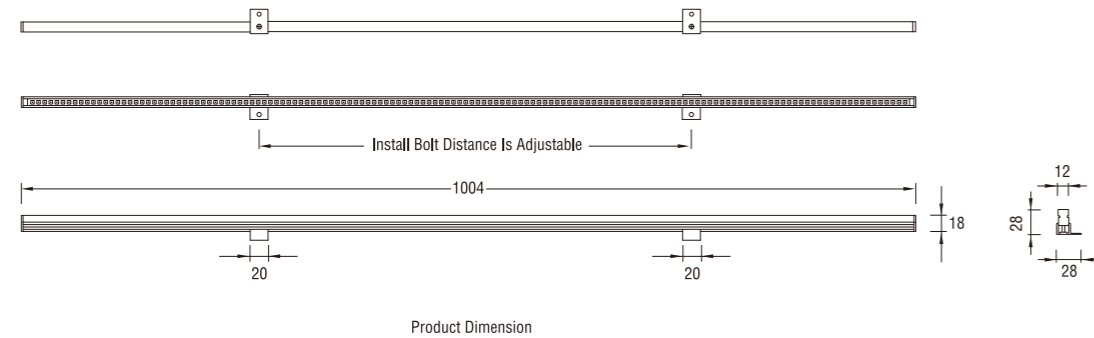


Product Description

1. Mini bar light is nice, simple design, it is small and exquisite, so it is easy to hide.
2. 6063 alloy aluminum shell, auto filling glue technology craft, special structure design ensures good heat removal, efficiently reducing LED's lighting wane, and make the mixed light average.

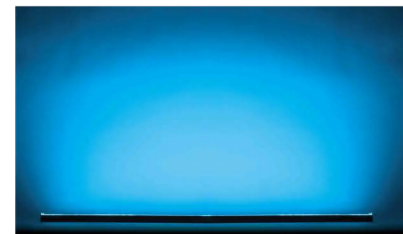

Light Distribution Curve

EFX-XJRL3

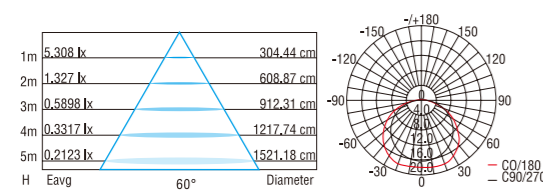


Specification

Product Code	EFX-XJRL3
LED Quantity	72pcs/144 pcs
Rated Power	6W/12W
Input Voltage	DC24V
Color	Single
Control Mode	CC
Beam Angle	120°
Temperature of Working Condition	-25°C~50°C
Humidity of Working Condition	10%~90%
Life	>30000H
Lamp Weight	0.5Kg
Protection Grade	IP66

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment



EFX-XJRL6

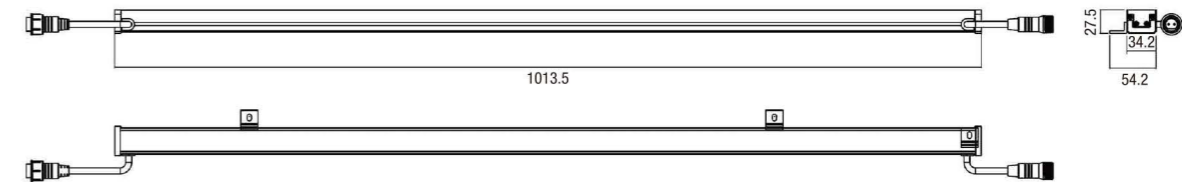


Product Description

1. Mini bar light is nice, simple design, it is small and exquisite, so it is easy to hide.
2. 6063 alloy aluminum shell, auto filling glue technology craft, special structure design ensures good heat removal, efficiently reducing LED's lighting wane, and make the mixed light average.



Light Distribution Curve






EFX-XJRL6

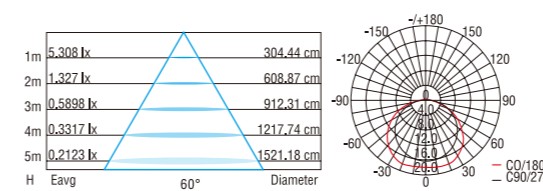

Specification

Product Code	EFX-XJRL6
LED Quantity	72pcs/144 pcs
Rated Power	6W/12W
Input Voltage	DC24V
Color	Single
Control Mode	CC
Beam Angle	120°
Temperature of Working Condition	-25°C~50°C
Humidity of Working Condition	10%~90%
Life	>30000H
Lamp Weight	0.5Kg
Protection Grade	IP66

LED Wall Washer Light Linear Light

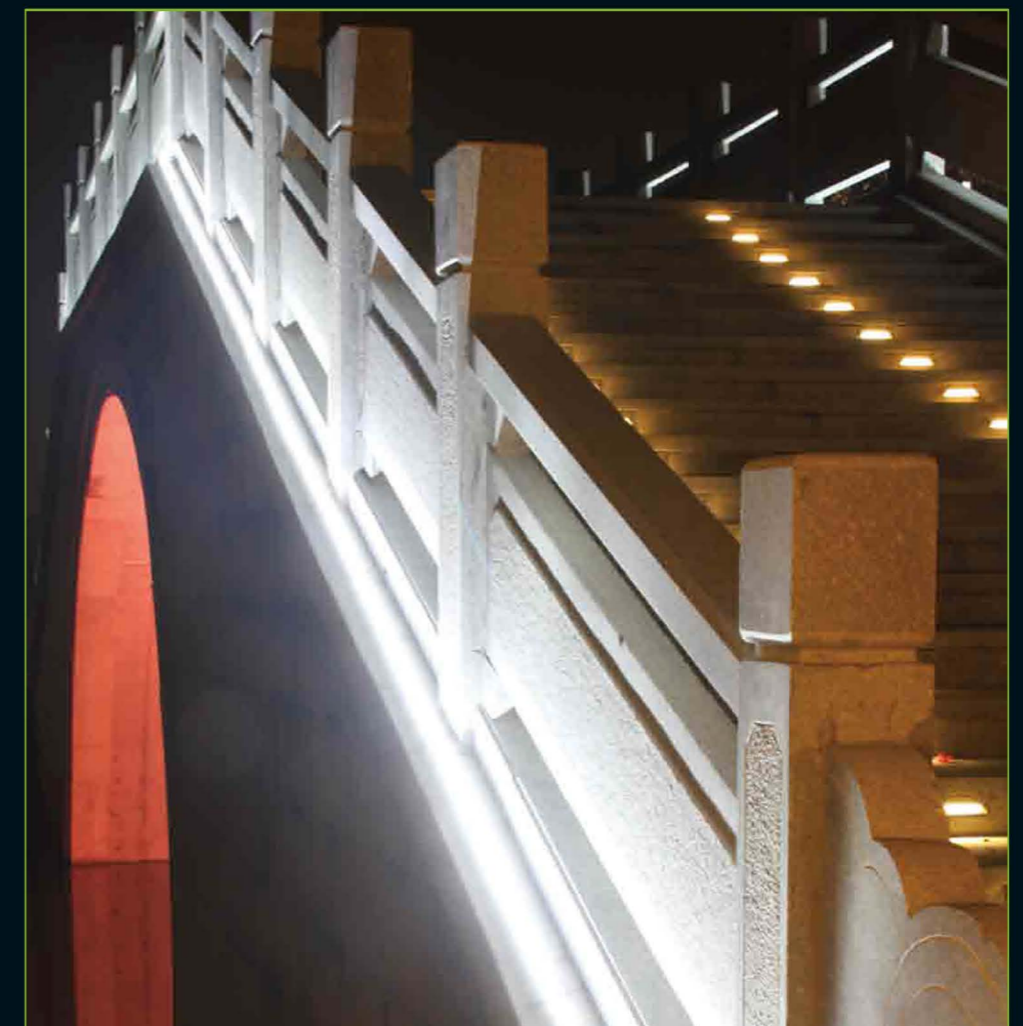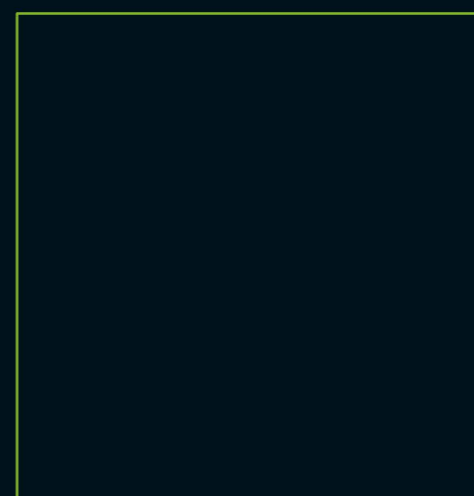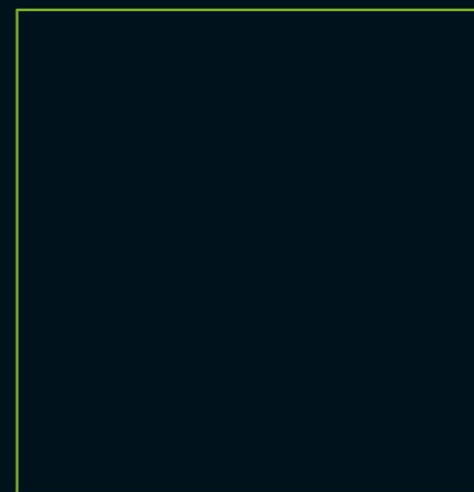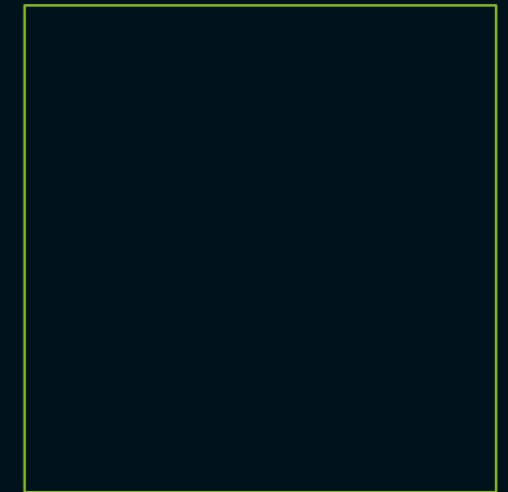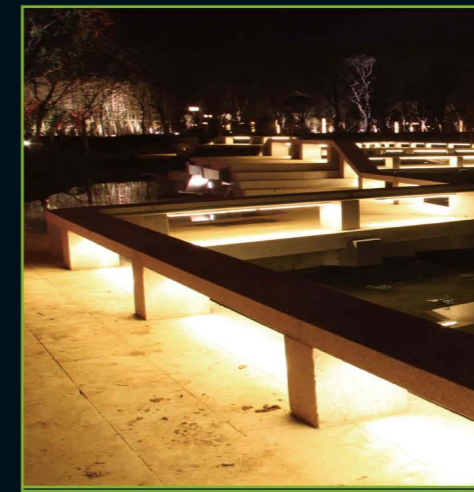



EFX-XJRL1 S36/S24/S12

Independent design of intellectual property, fashionable exterior design, make perfect combination of light and environment. 6063 alloy aluminum shell, auto filling glue technology craft, special structure design ensures good heat removal, efficiently reducing LED's lighting wane. Single color and RGB are available, it can mix color in short distance, and issue colorful light, special constant current diver technology to ensure LED work stably.




LED Wall Washer Light Linear Light

The Application of Occasions:

Mainly used for landscape lighting, stage, building, advertising board, green landscape lighting, bar, dancing hall etc.




RGB




Single Lighting



EFX-XJRL1-S36
EFX-XJRL1-S24
EFX-XJRL1-S12

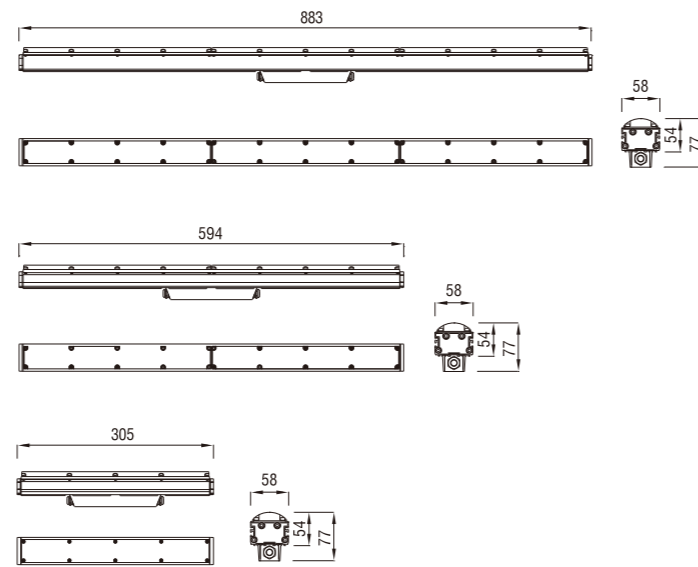

Product Dimension



Installing Support




Reliable Water-proof Connector

Product Description


1. Advanced design of light fitting heat removal, better performance.
2. PC diffuser, multiple section combined, convenient allocations.
3. reach the mixed light demand in a short time, various color available.
4. load light control design, efficiently controlling glaring.

Light Distribution Curve


EFX-XJRL1-S36

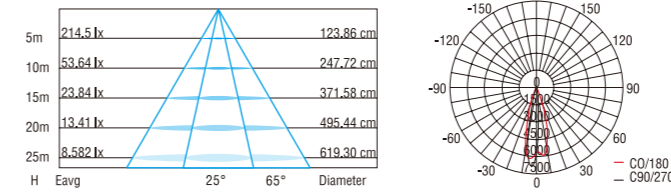

EFX-XJRL1-S24

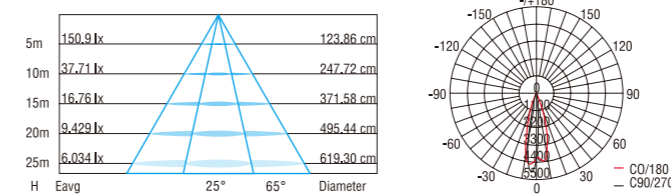

EFX-XJRL1-S12

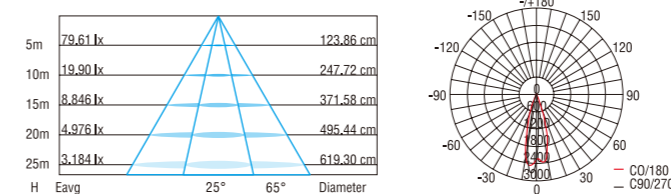


Specification

Product Code	EFX-XJRL1-S36	EFX-XJRL1-S24	EFX-XJRL1-S12
LED Quantity	36pcs	24pcs	12pcs
Rated Power	36W	24W	12W
Input Voltage	DC24V	DC24V	DC24V
Color	Single/RGB	Single/RGB	Single/RGB
Control Mode	CC/DMX512	CC/DMX512	CC/DMX512
Beam Angle	25°×65°	25°×65°	25°×65°
Lamp Luminous Flux	1519 lm	1068 lm	563 lm
Working Ambient Temperature	-25°C~50°C	-25°C~50°C	-25°C~50°C
Working Ambient Humidity	10%~90%	10%~90%	10%~90%
Life	> 30000H	> 30000H	> 30000H
Protection Grade	IP65	IP65	IP65
Net Weight	3.25/26.0	2.35/18.8	1.35/21.6
Gross Weight	3.9/31.2	2.6/20.8	1.7/27.2
Packing Size (mm)	935X95X125 955X430X300 8	645X95X125 675X430X300 8	355X95X125 375X430X550 16

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment

Product Accessory

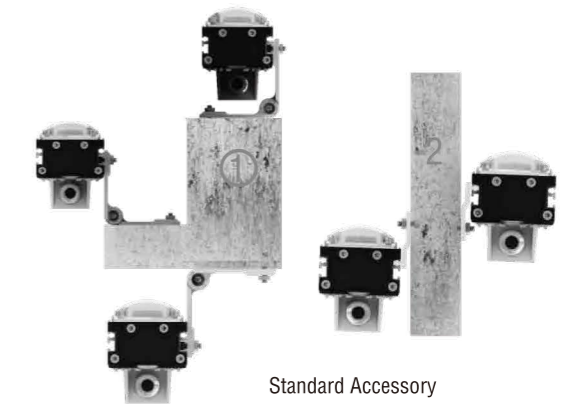

Standard Accessory




Standard Accessory



Special Accessory

Wiring Diagram

EFX-XJRL1

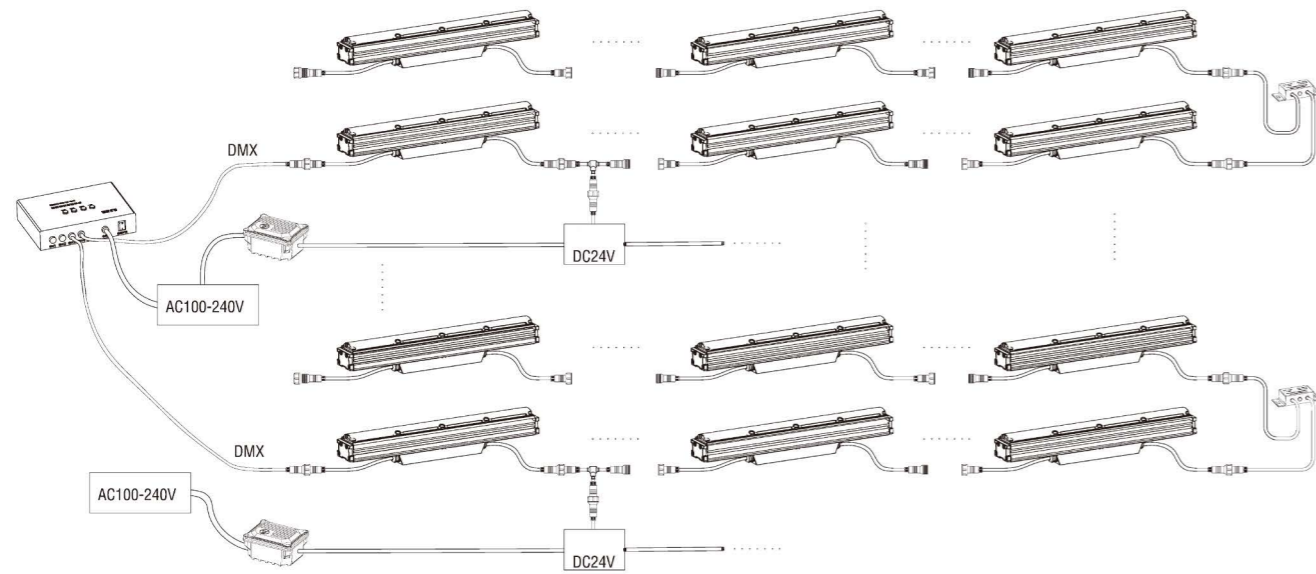

Accessories

EFX-XJRL1



Power Junction Box
EFX-XJRW-JXH-002



Signal Amplifier
EFX-XJRW-FDQ-005



Power+Signal Extension Cor
EFX-XDX2-M21G-5P/M21M-5P-(2x0.5mm²+GND+2x1.0mm²)-1000





Signal Extension Cord
EFX-XXH2-M21G-5P/M21M-5P-(2x0.5mm²+GND)-200



Power+Signal Three Joint
EFX-XDX3-M21G-5P/M21M-5P-(2x0.5mm²+GND+2x1.0mm²)-(300+1000)

LED Wall Washer Light Linear Light

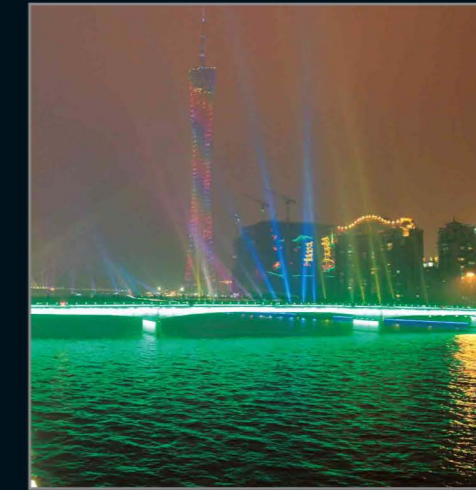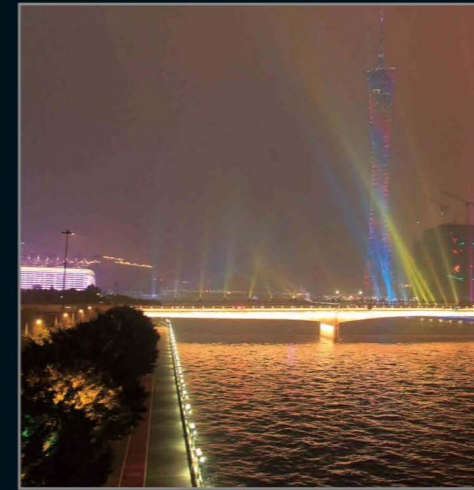

LED Wall Washer Light Linear Light



www.eco-fx.co.uk

EcoFX

LED lighting solutions

Office 1, 192 Shoreham Street
Sheffield S1 4SQ, UK

T: +44(0) 114 321 9610

E: enquiries@eco-fx.co.uk

Global Partner

Eco-FX

Smarter LED Lighting Solutions

Australia

