

LED Dual Task Light


Product code: EFX-TTDL1350

Eco-FX features & benefits:

- x1 full length - single extrusion for Low voltage LED bar housing
- Hollow knuckle provides a quick installation and ease of maintenance (lamp life up to 50,000hrs)
- Less screws and fewer attachments reduces manufacturing factor
- Simple threading cables and attaching to pole
- Reduced wattage still remains 12w as single terminal Check-in-Desk light
- Provide a modern, more practical, ergonomic LED solution
- Increased light distribution as the LED is pushing the light down
- To be incorporated directly onto an existing pole



LED Driver Housing

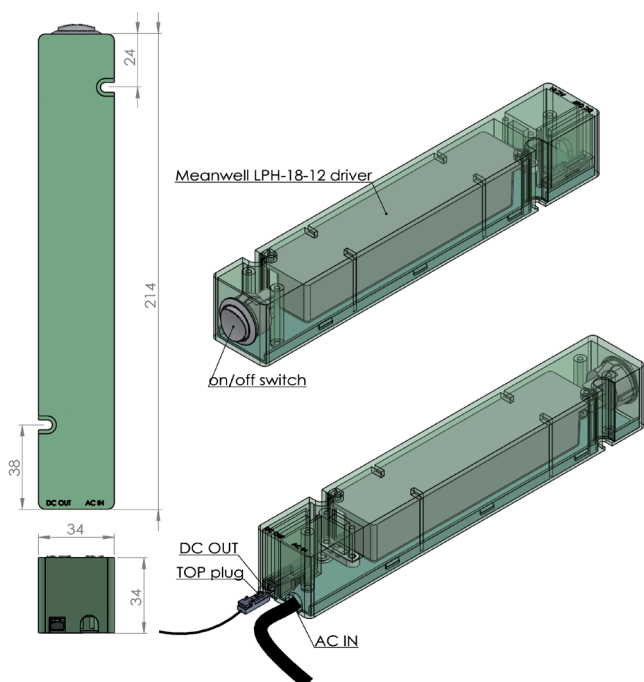

Technical Data/Per Lamp	
Product Code	EFX-TTDL1350
Size	Ø38 x L 1350mm x H 70.2mm
Beam Angle	120°
Input Voltage	110-256Vac
Frequency	50/60 Hz
Transformer Output	12W
Running Current	300mA
Power Factor	0.78
Chip Set	SMD
Efficiency (LOR)	80%
Colour Temperature	Cool White 4000K
Running Watts	12W
Lumen	Cool White 520lm
Efficacy	Cool White 65 lm/w
CRI	Cool White >75
Lux Level @ 1M	170 Lux
Internal Temperature	50°
External Temperature (Front)	25°
External Temperature (Back)	27°
Operating Temperature	-40 / +50°
IP Rating	20°
Cable	LSOH (Low Smoke Zero Halogen)