


# LED Gridlight (Double) 20w

Adjustable – Large Bezel



LED Gridlight - EFX-RDLDA210(L)

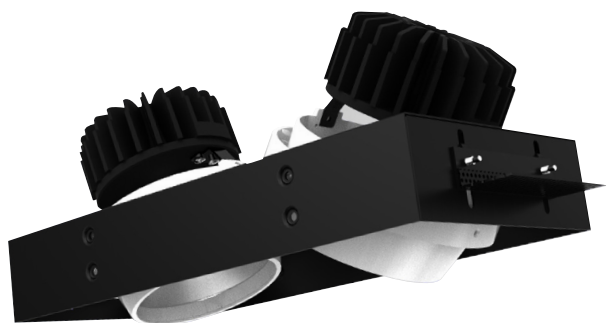

## LED Gridlight 20w - EFX-RDLDA210(L)

The Eco-FX LED Gridlight offers high luminosity giving efficient heat dissipation. The long life driver offers constant current and voltage. Offering total flexibility in the retail environment.

	Technical 20w
Product Code	EFX-RDLDA210(L)
Size	421mm x 288mm x 131mm
Beam Angle	55°
Input Voltage	110-265Vac
Frequency	50/60 Hz
Transformer Output	10W x2 28VDC x2
Running Current	350mA x2
Power Factor	0.9
Chip Set	Bridgelux
Efficiency (LOR)	92%
Colour Temperature	Warm White 2700k
Lumen	Warm White 800lm x2
Efficacy	Warm White 80lm/w
CRI	Warm White >80
TILT	30°
LED Life	50,000Hrs
Operating Temperature	-20° / +45°
IP Rating	20



### Eco-FX Limited

Office 1, 192 Shoreham Street  
Sheffield S1 4SQ, UK


t: +44 (0) 114 321 9610  
e: enquiries@eco-fx.co.uk

w: www.eco-fx.co.uk


Issue June 2014

©Copyright 2014 - Eco-FX Limited


### Illuminance

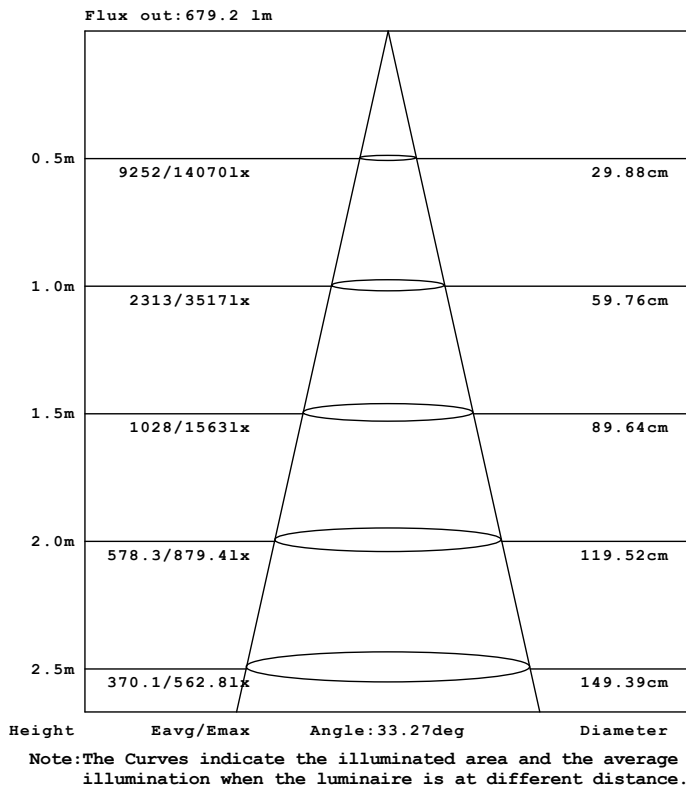

### Dimensions

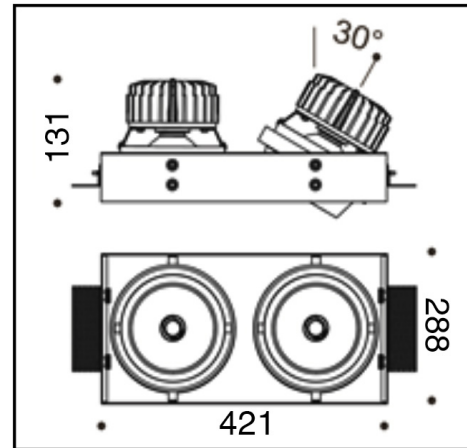

### Luminous Intensity Distribution Diagram (from a single lamp)

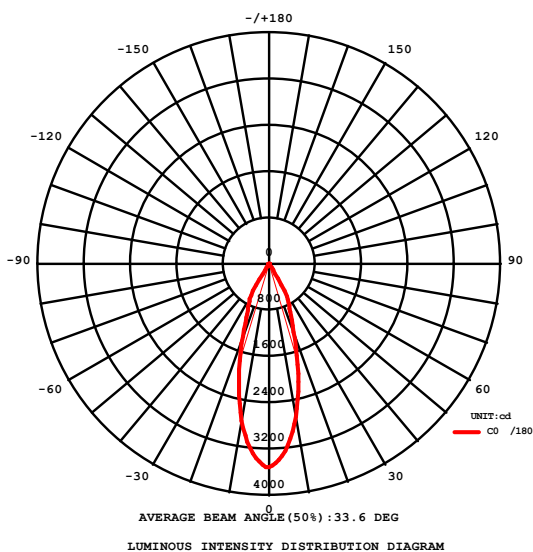

### Absolute Maximum Rating

Parameter	Rating
Operating Temperature	-20° / +45°
IP Rating	20