


# LED Pendant 10w



LED Pendant - EFX-RPLK10W

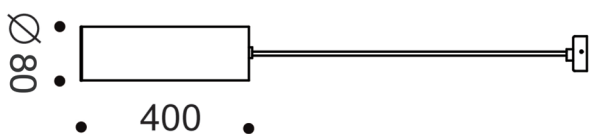

## LED Pendant - EFX-RPLK10W

The Eco-FX LED Pendant is available in various LED configurations and wattages. Available in a variety of colours. Die cast aluminium, polycarbonate diffuser, aluminium anodizer reflector, die cast aluminium heat sink, internal LED driver.

Technical	
Product Code	EFX-RPLK10W
Size	Ø80mm x 400mm
Beam Angle	40°
Input Voltage	110-265Vac
Frequency	50/60 Hz
Transformer Output	24-48V 16.8W Max
Running Current	350mA
Power Factor	0.9
Chip Set	Bridgelux
Efficiency (LOR)	95%
Colour Temperature	Warm White 3000k
Lumen	Warm White 800lm
Efficacy	80lm/w
CRI	Warm White >85+
LED Life	50,000Hrs
Operating Temperature	-40° / +50°
IP Rating	20