


LED Pendant 25w



LED Pendant - EFX-RPLK25W

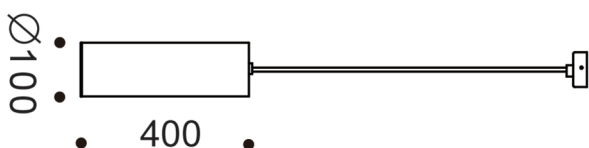

LED Pendant - EFX-RPLK25W

The Eco-FX LED Pendant is available in various LED configurations and wattages. Available in a variety of colours. Die cast aluminium, polycarbonate diffuser, aluminium anodizer reflector, die cast aluminium heat sink, internal LED driver.

Technical	
Product Code	EFX-RPLK25W
Size	Ø100mm x 400mm
Beam Angle	40°
Input Voltage	110-265Vac
Frequency	50/60 Hz
Transformer Output	25W 36VDC
Running Current	700mA
Power Factor	0.9
Chip Set	Bridgelux
Efficiency (LOR)	95%
Colour Temperature	Warm White 3000k
Lumen	Warm White 2000lm
Efficacy	80lm/w
CRI	Warm White >85+
LED Life	50,000Hrs
Operating Temperature	-40° / +50°
IP Rating	20