



Surface Mount LED Floodlight 240w

IP65

Product Code: EFX-IPD3LR96240D120

Product Description

using Fluid Dynamic Pressure (FDP) technology.

- Return on investment can be achieved after 1 year of operation!
- Highly energy efficient technology achieving a rating of 98.
- Ultra light and compact design for easy and safe installation.
- World leading heat management technology ensuring the long life and high performance of the LEDs. 46°C maximum.
- Various light beam angle options including 20, 30, 40, 60 & 120 degrees, suitable for numerous applications
- The 240W Flood Light consists of the highest quality components available in todays technology, making it the Ultimate lighting solution for any high power application.
- 5 Year Warranty
- Ceiling or Pipe Mounted attachments

Applications

- Outdoor Fields
- Building Exteriors
- Golf Courses
- Train Stations
- Factories/Warehouses
- Car Parks
- Ports
- Sporting Arenas
- Sports Courts/Stadiums
- Airports

Specifications

Rated Power	240W
Power Factor	>0.9
Lamp Input Voltage	AC 75-230V
Frequency Range	50/60Hz
Electrical Efficiency	98
Luminous Efficiency	75.6 lm/w
Color Rendering Index (CRI)	72 - 95
Colour Temperature	6000K
LED Chip	Philips Rebel ES
Luminous Flux	18517 lm
Beam Angles	120°
Life	50,000 HR
Protection Grade	IP65
Dimensions (W/D/H)	Ø500x120 mm
Lamp Weight	6.7kg
Working Temperature	-40°C- +70 °C



Eco-FX Limited

Office 1, 192 Shoreham Street
Sheffield S1 4SQ, UK

t: +44 (0) 114 321 9610
e: enquiries@eco-fx.co.uk

w: www.eco-fx.co.uk


Issue February 2013

©Copyright 2013 - Eco-FX Limited

Surface Mount LED Floodlight 240w

Product Code: EFX-IPD3LR96240D120

Light Distribution Curve 120°

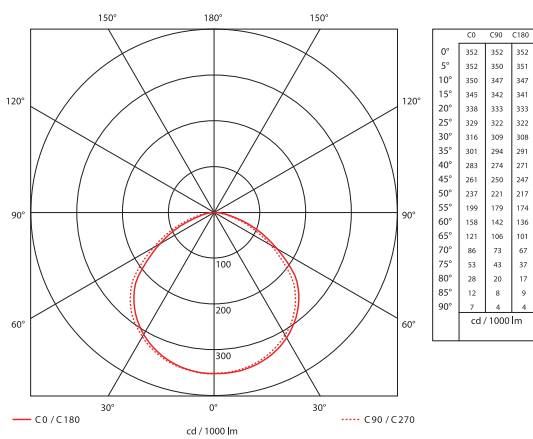

Dimensions

