


LED Gridlight (Double) 20w

Adjustable



LED Gridlight - EFX-RDLDA210

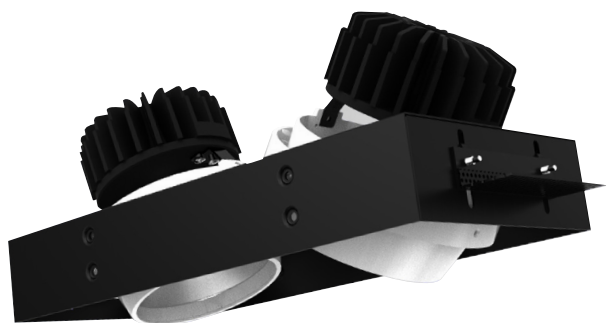


LED Gridlight 20w - EFX-RDLDA210

The Eco-FX LED Gridlight offers high luminosity giving efficient heat dissipation. The long life driver offers constant current and voltage. Offering total flexibility in the retail environment.

	Technical 20w
Product Code	EFX-RDLDA210
Size	316mm x 163mm
Beam Angle	55°
Input Voltage	110-265Vac
Frequency	50/60 Hz
Transformer Output	10W x2 28VDC x2
Running Current	350mA x2
Power Factor	0.9
Chip Set	Bridgelux
Efficiency (LOR)	92%
Colour Temperature	Warm White 2700k
Lumen	Warm White 800lm x2
Efficacy	Warm White 80lm/w
CRI	Warm White >80
TILT	30°
LED Life	50,000Hrs
Operating Temperature	-20° / +45°
IP Rating	20




Illuminance

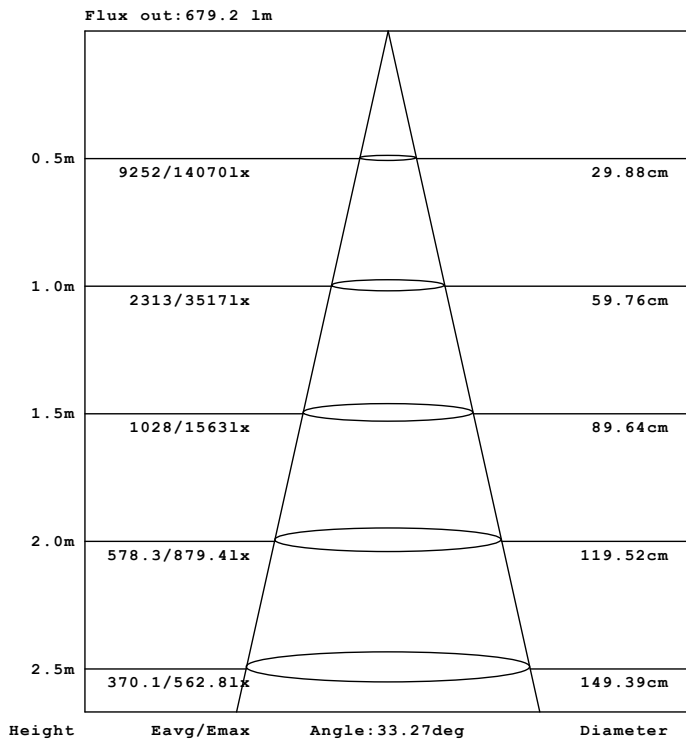


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Dimensions

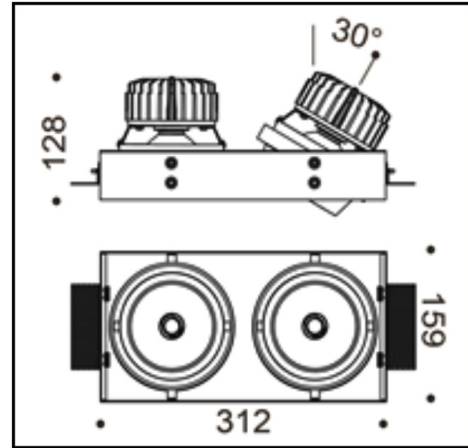

Luminous Intensity Distribution Diagram (from a single lamp)

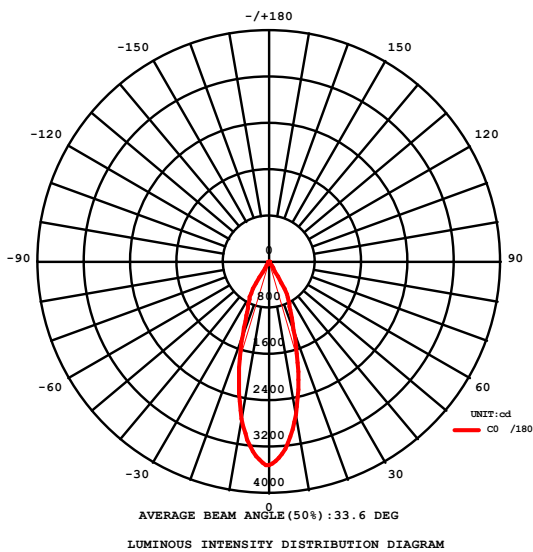

Absolute Maximum Rating

Parameter	Rating
Operating Temperature	-20° / +45°
IP Rating	20