


# Diffused LED Bar 14w





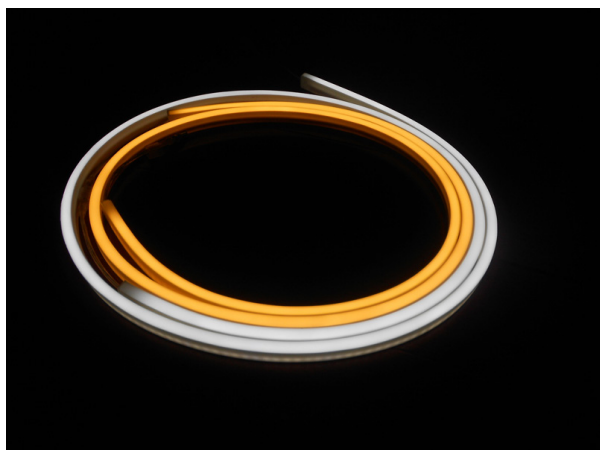

Diffused LED Bar - EFX-FDS30141203

## Diffused LED Bar - EFX-FDS30141203

Eco-FX Diffused LED Bar features a three side soft diffused light with no LED dots. Designed with PU glue, this provides a fully water resistant LED bar with no need for additional sleeves. High shock and vibration resistant maximum length is 5M. Suitable for any location.

Technical 14w	
Product Code	EFX-FDS30141203
Size	5000mm x 10mm x 20mm
Beam Angle	120°
Input Voltage	110-265Vac
Frequency	50/60 Hz
Trasformer Output	12/24VDC 14w/m
Power Factor	0.95
Chip Set	SMD 3014
Efficiency (LOR)	98%
Colour Temperature	Warm White 2700-3000k Cool White 6000k
Lumen	Warm White 520lm Cool White 780lm
Efficacy	Warm White 37.14 lm/w Cool White 55.7 lm/w
CRI	Warm White >85 Cool White >80
Operating Temperature	-40° / +50°
IP Rating	68

**RoHS**