









Circular Recessed Directional Downlight 9W



Circular Recessed Directional Downlight – EFX-RGADL9W

Technical 9W	
Product Code	EFX-RGADL9W
Size	Ø76mm x 99mm
Beam Angle	20° or 40°
Input Voltage	110-265Vac
Frequency	50/60Hz
Transformer Output	9W 35.5VDC
Running Current	250mA
Power Factor	0.93
Chip Set	Citizen
Efficiency (LOR)	95%
Colour Temperature	Warm White 3000k
Lumen	Warm White 1136lm
Efficacy	126.22lm/w
CRI	Warm White >80
LED Life	36,000Hrs L70
Operating Temperature	-40° / +50°
IP Rating	44
Cut Out	Ø68mm
Tilt	0 – 20°

Circular Recessed Directional Downlight 9W - EFX-RGADL9W

The Eco-FX EFX-RGADL9W is designed with a removable light engine, the light engine can be assembled / disassembled by twisting the light engine, tool-free, very convenient with fixed type and tilt type trim accessory. The delicate design is the luminaire integrated with the heat sink throughout a thermal structure and in a simple appearance. With the quick release of design, it can mix and match the multiple coloured bezels and baffles to achieve a unique effect. The easy assemble methods is also very convenient to replace the reflector for 20° to 40°. The Eco-FX EFX-RGADL9W is also designed with IP44 rated. UGR <19. Suitable for hotels, retail, corridors, guest room, bathroom.

Eco-FX Limited

Office 1, 192 Shoreham Street
Sheffield S1 4SQ, UK



t: +44 (0) 114 321 9610
e: enquiries@eco-fx.co.uk

w: www.eco-fx.co.uk

Issue May 2016

©Copyright 2016 - Eco-FX Limited

Luminaire assembly and configurations

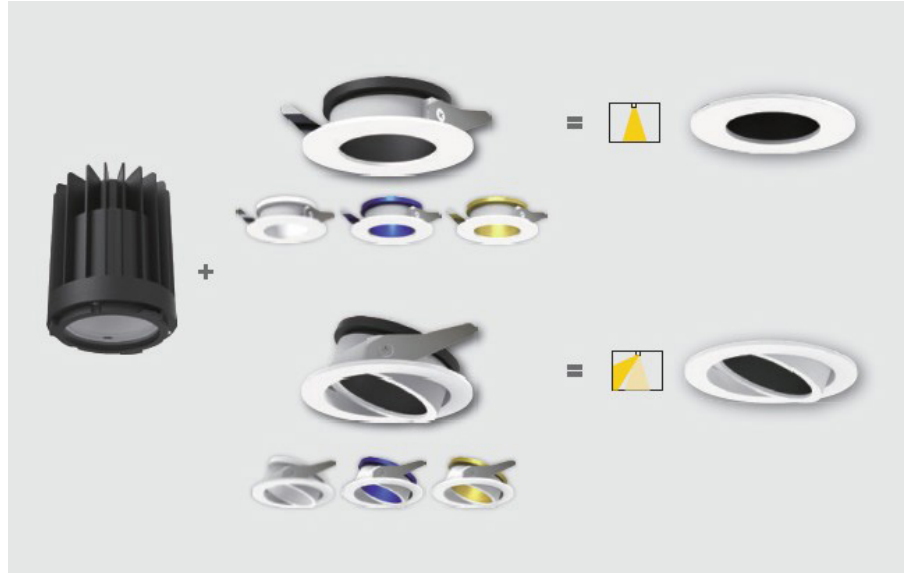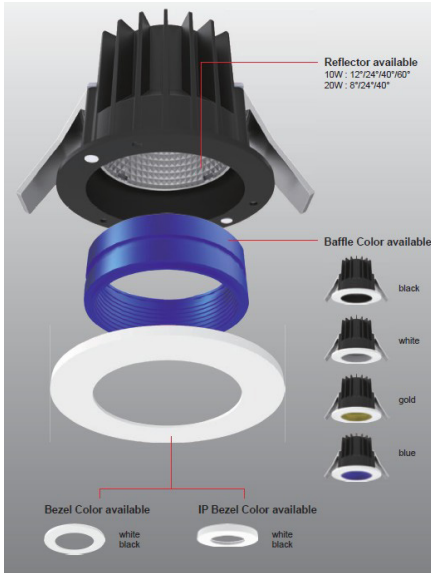

LED Downlight Dimensions and Cut-out view

